


## FLEX – SPIRAL - TECHNICAL INFORMATION

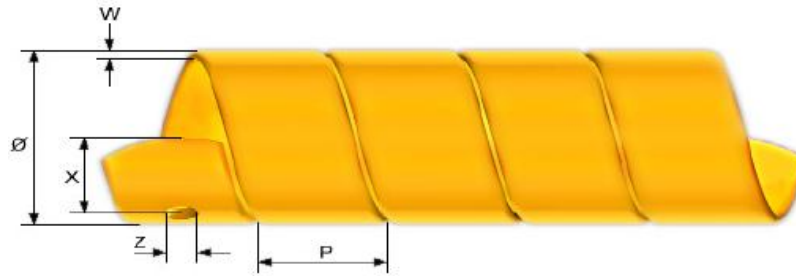

Material : High Density Polyethylene

The hose protector withdraws during the storing and the transportation but will return its original size when installed.

| Nominal outer / inner<br>Ø | Weight ca. kg/m | Wall W mm | Pitch P mm | Length only in<br>coils |
|----------------------------|-----------------|-----------|------------|-------------------------|
| 20 / 16.8mm                | 0.08            | 1.6       | 16         | 25m                     |
| 25 / 21.6mm                | 0.10            | 1.7       | 19         | 25mm                    |
| 32 / 28mm                  | 0.18            | 2.0       | 22         | 25mm                    |
| 50 / 44.8mm                | 0.35            | 2.6       | 24         | 25mm                    |
| 75 / 68.6mm                | 0.65            | 3.2       | 35         | 20mm                    |

\* Please notice that this product **does not** contain a hole at each end.

Gentle Automatic Solution Sdn Bhd

No: 36 Jalan Industri USJ 1/13, Taman Perindustrian USJ 1, 47600 Subang Jaya, Selangor Darul Ehsan

Tel : 603-80237743 / 8743    Fax : 603-80239743

<http://www.gentle.com.my>

Email : [sales@gentle.com.my](mailto:sales@gentle.com.my)