


SAFE – SPIRAL – TECHNICAL INFORMATION

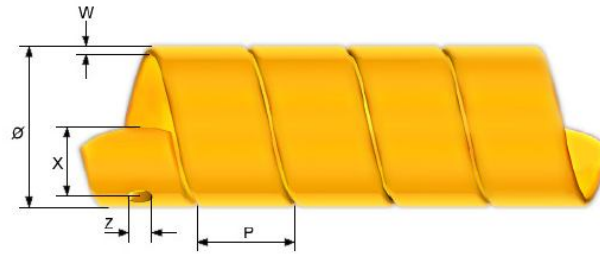

Material : High Density Polyethylene

Hose protectors withdraw during the storing and the transportation but will return to its original size when installed. Rolls do not have a hole at the end.

Nominal Outer Ø	Nominal Inner Ø	Weight ca. kg/m	Wall W mm	Pitch P mm	Hole distance X mm	Hole diameter Z mm	Recommended usage range Hose diameter mm
12mm	9.6mm	0.04	1.2	10,5	-	-	9 – 13
16mm	13.4mm	0.06	1.3	12	-	-	13 – 18
20mm	16.0mm	0.09	2.0	20	-	-	16 – 22
25mm	20.3mm	0.15	2.2	21.5	-	-	20 – 27
32mm	27.0mm	0.19	2.5	22	-	-	27 – 36
40mm	34.6mm	0.30	2.7	24	-	-	34 – 44
50mm	43.2mm	0.40	3.4	30	-	-	43 – 55
63mm	55.6mm	0.65	3.7	27	-	-	55 – 67
75mm	66.2mm	0.73	4.4	42	35	10	66 – 80
90mm	80.2mm	1.20	4.9	45	35	10	80 – 98
110mm	99.0mm	1.76	5.5	50	35	10	99 – 115
125mm	113.2mm	2.05	5.9	52	35	10	113 – 130
140mm	127.0mm	2.50	6.5	55	35	10	125 - 155

Gentle Automatic Solution Sdn Bhd

No: 36 Jalan Industri USJ 1/13,Taman Perindustrian USJ 1,47600 Subang Jaya,Selangor Darul Ehsan

Tel : 603-80237743 / 8743 Fax : 603-80239743

<http://www.gentle.com.my>

Email : sales@gentle.com.my