

Lateral load resisting
2-4 times
* Compared to compact cylinder Series CQ

Non-rotating accuracy
±0.2° or less
Refer to page 7-5-4 for details.


Guide Rod

Load can be directly mounted.

Mounting dimensions compatible

External dimensions

Slide bearing

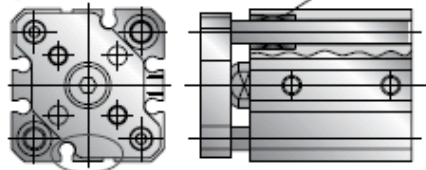

Auto switch is mountable/removable even when the plate is retracted.