

Metering Valve with Silencer

Series ASN2



Superior sound reducing performance

Over 20 dB at max. flow rate

Cylinder speed easily set

Shape of needle is the same as that of speed controller

Retainer prevents accidental loss of needle




Symbol



<Example of mounting>

Metering Valve with Silencer



Model

Model	Port size	Sonic conductance dm ³ /(s.bar)	Critical pressure ratio	Weight (g)
ASN2-M5	M5 x 0.8	0.36	0.15	5
ASN2-U10/32	10-32 UNF	0.36		5
ASN2-01	1/8	0.72	0.35	17
ASN2-02	1/4	1.3		34
ASN2-03	3/8	3.32		55
ASN2-04	1/2	4.9		107

Specifications

Proof pressure	1.5 MPa
Operating pressure range	0 to 1 MPa
Ambient and fluid temperature	- 5 to 60°C (No freezing)

How to Order

ASN2 - [] 03 - [] - []

Thread type

Nil	Metric thread (M5)
	Unified thread (10-32 UNF)
N	R
	NPT

Lock nut option

Nil	Hexagon lock nut
J	Round lock nut

Option Note)

Nil	None
S	With seal


Note) M5 and U10/32 are not available with seals.

Port size

M5	M5 x 0.8
U10/32	10-32 UNF
01	1/8
02	1/4
03	3/8
04	1/2

Needle Valve/ Flow Characteristics

Note) The flow characteristics are representative values.




GENTLE AUTOMATIC SOLUTION SDN BHD

No. 36 Jalan Industri USJ 1/13, Taman Perindustrian USJ 1, 47600 Subang Jaya, Selangor.

TEL: 603-8023 7743 / 8743 FAX: 603-8023 9743 EMAIL: sales@gentle.com.my

Construction




Component Parts

No.	Description	Material	Note
1	Handle	PBT	
2	Needle	Brass	Electroless nickel plated
3	Lock nut	Steel (2)	Zinc chromated (1)
4	Needle guide	Brass	Electroless nickel plated
5	Washer	Carbon steel	Nickel plated
6	O-ring	NBR	
7	Silencer	PVA sponge	
8	Silencer cover	Soft polyethylene	
9	Body B	Brass	Electroless nickel plated
10	Gasket	NBR/Stainless steel	M5, U10/32 only

Note 1) The round lock nut is electroless nickel plated.
 Note 2) The round lock nut is made of brass. However, note that only the ASN2-□01 and □02 use steel.

Dimensions



Dimensions

Model	Screw D	øD	L1 (2)		H
			Min.	Max.	
ASN2-M5	M5 x 0.8	10	20.5	23.3	8
ASN2-U10/32	10-32 UNF	10	20.5	23.3	8
ASN2-01	1/8	15	29.1	34.1	12 (12.7)
ASN2-02	1/4	20	33.7	38.7	17 (17.5)
ASN2-03	3/8	25	35.9	40.9	19
ASN2-04	1/2	30	48.1	53.1	24 (23.8)

Note 1) (in parentheses) are the dimensions of "NPT" screw specifications.
 Note 2) L1: Reference dimensions

⚠ Specific Product Precautions


- Be sure to read before handling.
- Refer to front matter 56 for Safety Instructions and pages 468 to 471 for Flow Control Equipment Precautions.

Selection

⚠ Warning


1. Example of inapplicable circuits

(a) Perfect Valve (VF66□□, VS7-6-FPG, VS7-8-FPG)



Residual pressure behind the exhaust needle may cause check valve malfunction in the Perfect Valve.

(b) Pilot check valve between Actuator and Valve



Residual pressure behind the exhaust needle may cause pilot check valve malfunction.

Installation

⚠ Warning

1. If installing flow controls to valve ports, interference may occur with the fittings. Please consult the catalog before installing.

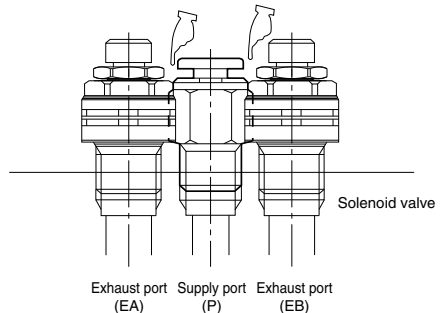


Fig. Example of the interference with fittings

GENTLE AUTOMATIC SOLUTION SDN BHD

No. 36 Jalan Industri USJ 1/13, Taman Perindustrian USJ 1, 47600 Subang Jaya, Selangor.

TEL: 603-8023 7743 / 8743 FAX: 603-8023 9743 EMAIL: sales@gentle.com.my

AS
 TMH
 ASD
 AS
 AS-FE
 KE
 AS-FG
 AS-FP
 AS-FM
 AS-D
 AS-T
 ASP
 ASN
 AQ
 ASV
 AK
 VCHC
 ASS
 ASR
 ASQ