

# Reed Auto Switch Rail Mounting Style D-A73C/D-A80C



## Connector




## Caution

### Precautions


1. Confirm that the connector is appropriately tightened. If tightened insufficiently, the waterproof performance will deteriorate.
2. Refer to page 1355 for the details.

## Auto Switch Internal Circuit

### D-A73C

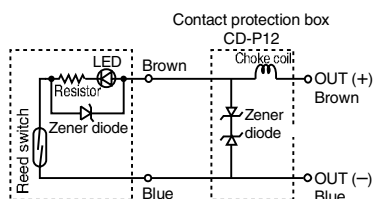

### D-A80C



Note 1) Operating load is an induction load.  
Note 2) Wiring to the load is 5 m or longer.  
Use the contact protection box in any of the above listed situations. The contact point life may decrease. (Refer to page 1273 for contact protection box.)

## Auto Switch Specifications

PLC: Programmable Logic Controller

### D-A73C (With indicator light)

Auto switch model	D-A73C
Applicable load	Relay, PLC
Load voltage	24 VDC
Load current range <sup>(4)</sup>	5 to 40 mA
Contact protection circuit	None
Internal voltage drop	2.4 V or less
Indicator light	Red LED illuminates when turned ON.
Standard	CE marking

### D-A80C (Without indicator light)

Auto switch model	D-A80C
Applicable load	Relay, IC circuit, PLC
Load voltage	24 V <sub>DC</sub>
Maximum load current	50 mA
Contact protection circuit	None
Internal resistance	1 Ω or less (Including lead wire length of 3 m)
Standard	CE marking

• Lead wires — Oilproof heavy-duty vinyl cord, ø3.4, 0.2 mm<sup>2</sup>, 2 cores (Brown, Blue), 0.5 m

Note 1) Refer to page 1272 for reed auto switch common specifications.

Note 2) Refer to page 1272 for lead wire lengths.

Note 3) Lead wire with connector may be shipped with the auto switch.

Note 4) Under 5 mA, the strength of the indicator light is poor. In some cases, visibility of the indicator light will not be possible where the output signal is less than 2.5 mA. However, there is no problem in terms of contact output, when an output signal exceeds 1 mA or more.

## Mass

(g)

Auto switch model		D-A73C	D-A80C
Lead wire length (m)	0.5	12	12
	3	54	54
	5	84	84

## Dimensions

(mm)

