


Reed Auto Switch Direct Mounting Type

D-A90(V)/D-A93(V)/D-A96(V)

Grommet



⚠ Caution

Precautions

1. Do not drop or bump the auto switch while handling it as it may result in the auto switch breaking.
2. Do not remove the protective cover attached to the product body until the product is ready to be mounted on the actuator.
3. Fix the auto switch with the existing screw installed on the auto switch body. The auto switch may be damaged if a screw other than the one supplied is used.

Auto Switch Specifications

PLC: Programmable Logic Controller

D-A90, D-A90V (Without indicator light)		D-A90, D-A90V	
Auto switch model		IC circuit, Relay, PLC	
Applicable load		IC circuit, Relay, PLC	
Load voltage	24 V _{DC} or less	48 V _{DC} or less	100 V _{DC} or less
Maximum load current	50 mA	40 mA	20 mA
Internal circuit-		r	
Contact protection circuit		None	
Internal resistance	1 Ω or less (Including lead wire length of 3 m)		
Standard	CE/UKCA marking		
D-A93, D-A93V, D-A96, D-A96V (With indicator light)			
Auto switch model	D-A93, D-A93V	D-A96, D-A96V	
Applicable load	Relay, PLC	IC circuit	
Load voltage	24 VDC ⁽⁴⁾	100 VAC	4 to 8 VDC
Load current range and Maximum load current ⁽⁵⁾	5 to 40 mA	5 to 20 mA	20 mA
Internal circuit-		e	t
Contact protection circuit	None		
Internal voltage drop	D-A93: 2.4 V or less (up to 20mA) 3 V or less (up to 40 mA) D-A93V: 2.7 V or less		0.8 V or less
Indicator light	Red LED illuminates when turned ON.		
Standard	CE/UKCA marking		

Oilproof Heavy-duty Lead Wire Specifications

Auto switch model		D-A90(V)	D-A93(V)	D-A96(V)
Sheath	Outside diameter [mm]	ø2.7		
Insulator	Number of cores	2 cores (Brown/Blue)		3 cores (Brown/Blue/Black)
	Outside diameter [mm]	ø0.96		ø0.91
Conductor	Effective area [mm ²]	0.18		0.15
	Strand diameter [mm]	ø0.08		
Lead wire length [m] (Standard)		17		

*Refer to the applicable internal circuit diagram (numbers q to u) on page 1587.

Note 1) Refer to page 1584 for reed auto switch common specifications.

Note 2) Refer to page 1584 for lead wire lengths.

Note 3) Under 5 mA, the strength of the indicator light is poor. In some cases, visibility of the indicator light will not be possible where the output signal is less than 2.5 mA. However, there is no problem in terms of contact output, when an output signal exceeds 1 mA or more.

Note 4) The auto switches can operate at 12 VDC, but consider the internal voltage drop of the auto switch described in Reed Auto Switch Precautions on page 12.

Weight


(g)

Model		D-A90	D-A90V	D-A93	D-A93V	D-A96	D-A96V
Lead wire length	0.5 m (Nil)	6	6	6	6	8	8
	1 m (M)	—	—	11	—	—	—
	3 m (L)	30	30	30	30	41	41
	5 m (Z)	—	—	47	47	—	—


(mm)

Dimensions

D-A90/D-A93/D-A96

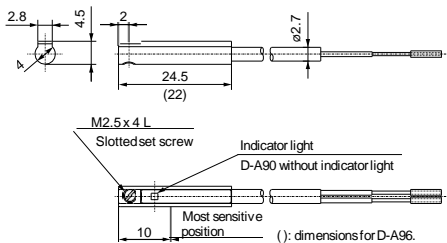


D-A90V/D-A93V/D-A96V

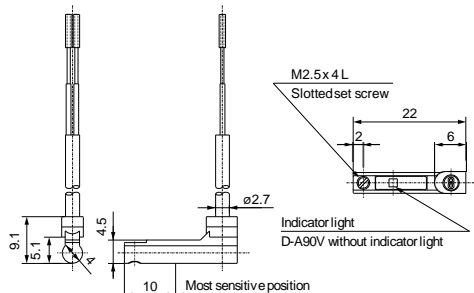

Gentle Automatic Solution Sdn Bhd

No.36, Jalan Industri USJ 1/13, Taman Perindustrian USJ 1, 47600 Subang Jaya, Selangor.
TEL: 603-8023 7743 / 8743 FAX: 603-8023 9743

 www.gentle.com.my
 sales@gentle.com.my

 0122738827

 waze.to/lr/hw28325k63